


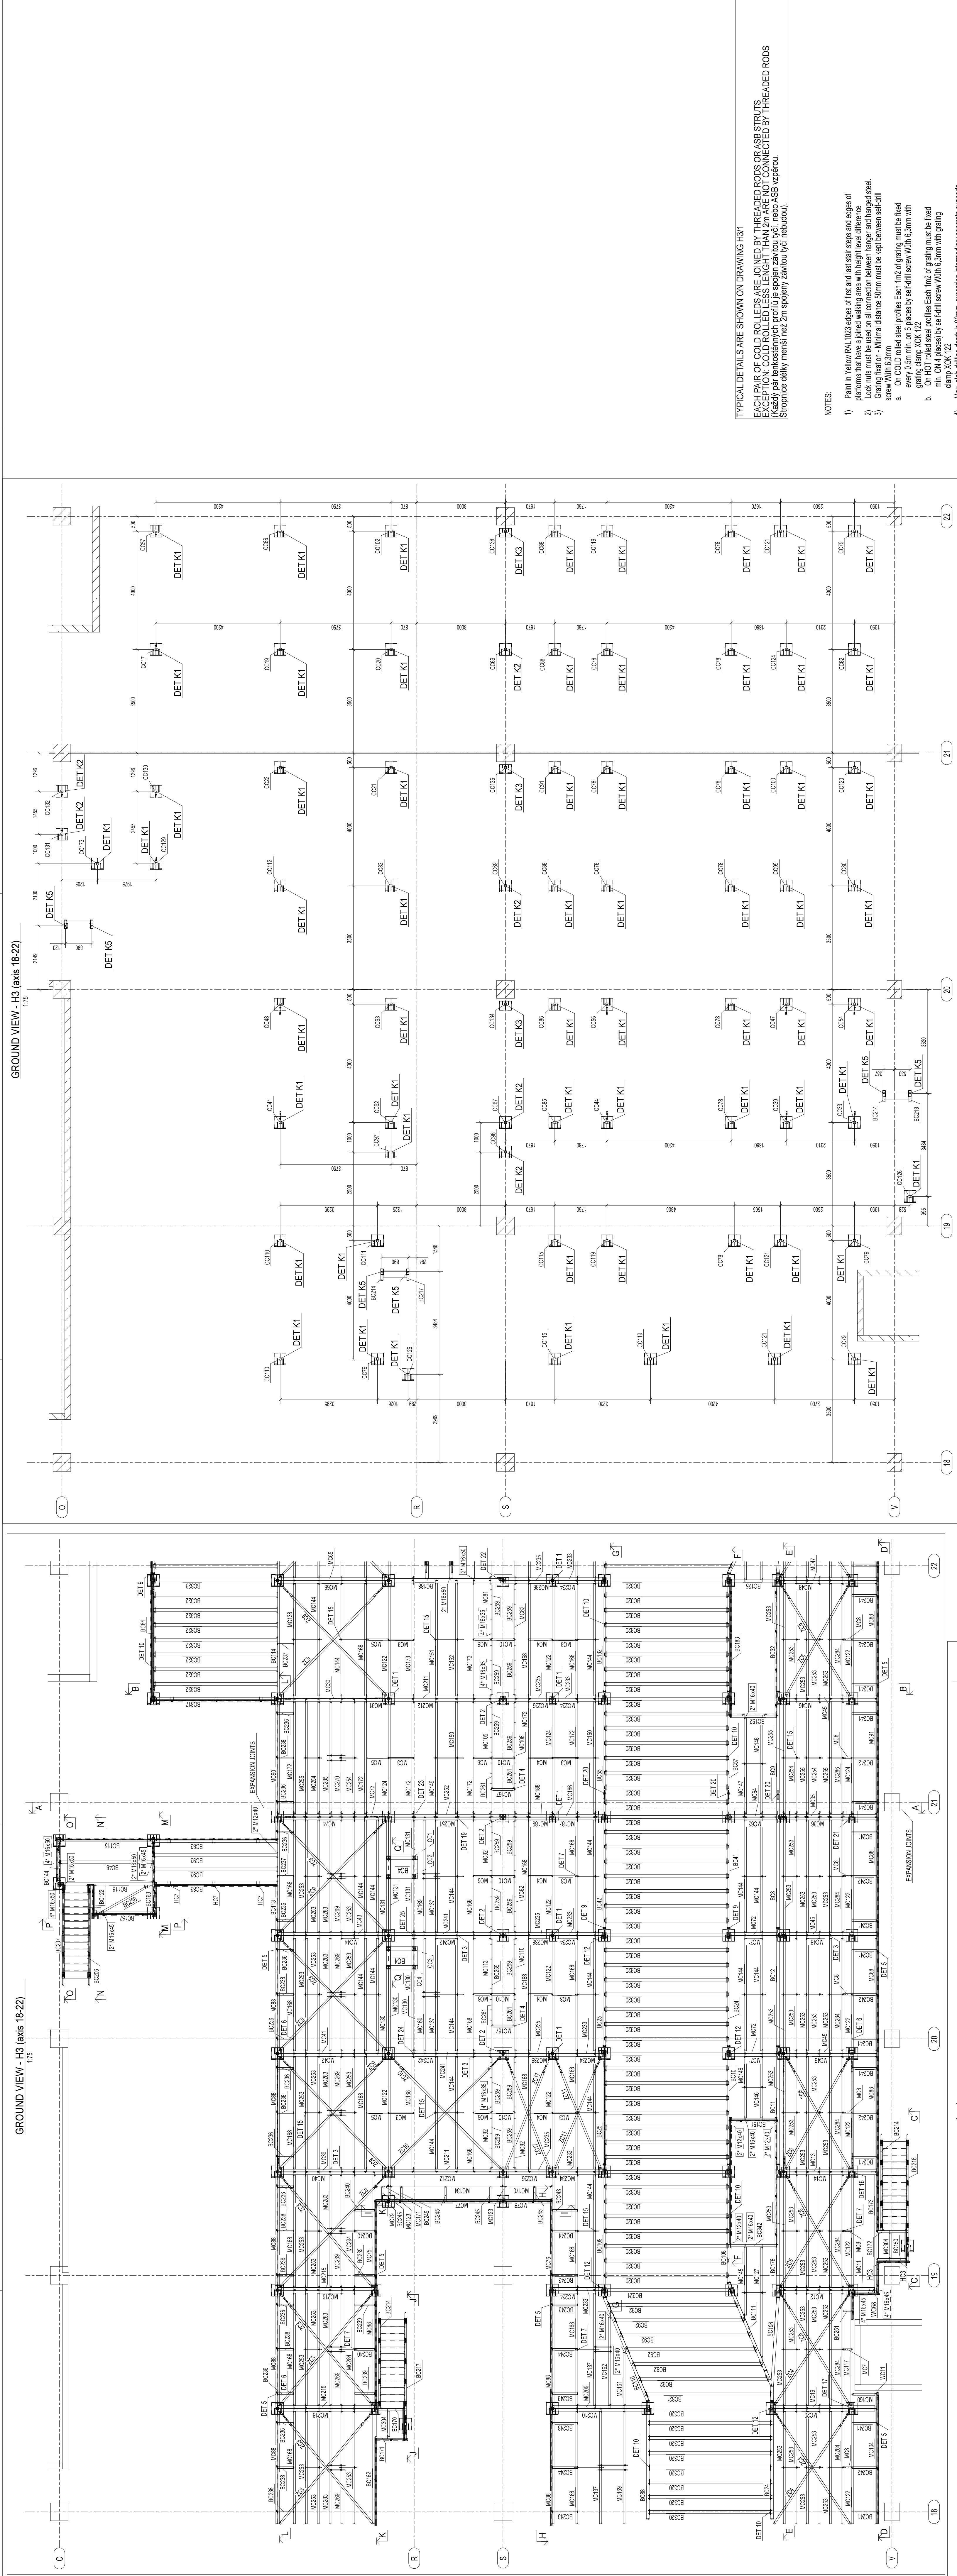

TYPICAL DETAILS ARE SHOWN ON DRAWING 831

EACH PAIR OF COIL ROLLED STRUTS ARE JOINED BY THREADED RODS OR ASB STRUTS. EXCEPTION: COIL ROLLED STRUTS LESS THAN 2m ARE NOT CONNECTED BY THREADED RODS. SURFACES SHALL BE GALVANIZED OR GALVANNEAL COATED.

NOTES

- 1) Paint in yellow RAL 1023 edges of flat and flat steel steps and edges of steel plates.
- 2) Lock nuts must be used on all connections between larger and tapered steel.
- 3) Galling location - Minimal distance 50mm must be kept between self-drilling screws.
- 4) On COIL rolled steel profiles: Each 1m² of galting must be fixed every 0.5m min. on 6 pieces by self-drill screw with 6.3mm with galling clamp XOK 122.
- 5) On COIL rolled steel profiles: Each 1m² of galting must be fixed every 0.5m min. on 6 pieces by self-drill screw with 6.3mm with galling clamp XOK 122.
- 6) Mark CE on nut must be always visible.
- 7) Mark CE on nut must be always visible.
- 8) Mark CE on nut must be always visible.
- 9) Mark CE on nut must be always visible.
- 10) Mark CE on nut must be always visible.
- 11) Mark CE on nut must be always visible.
- 12) Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

Mark CE on nut must be always visible.

