
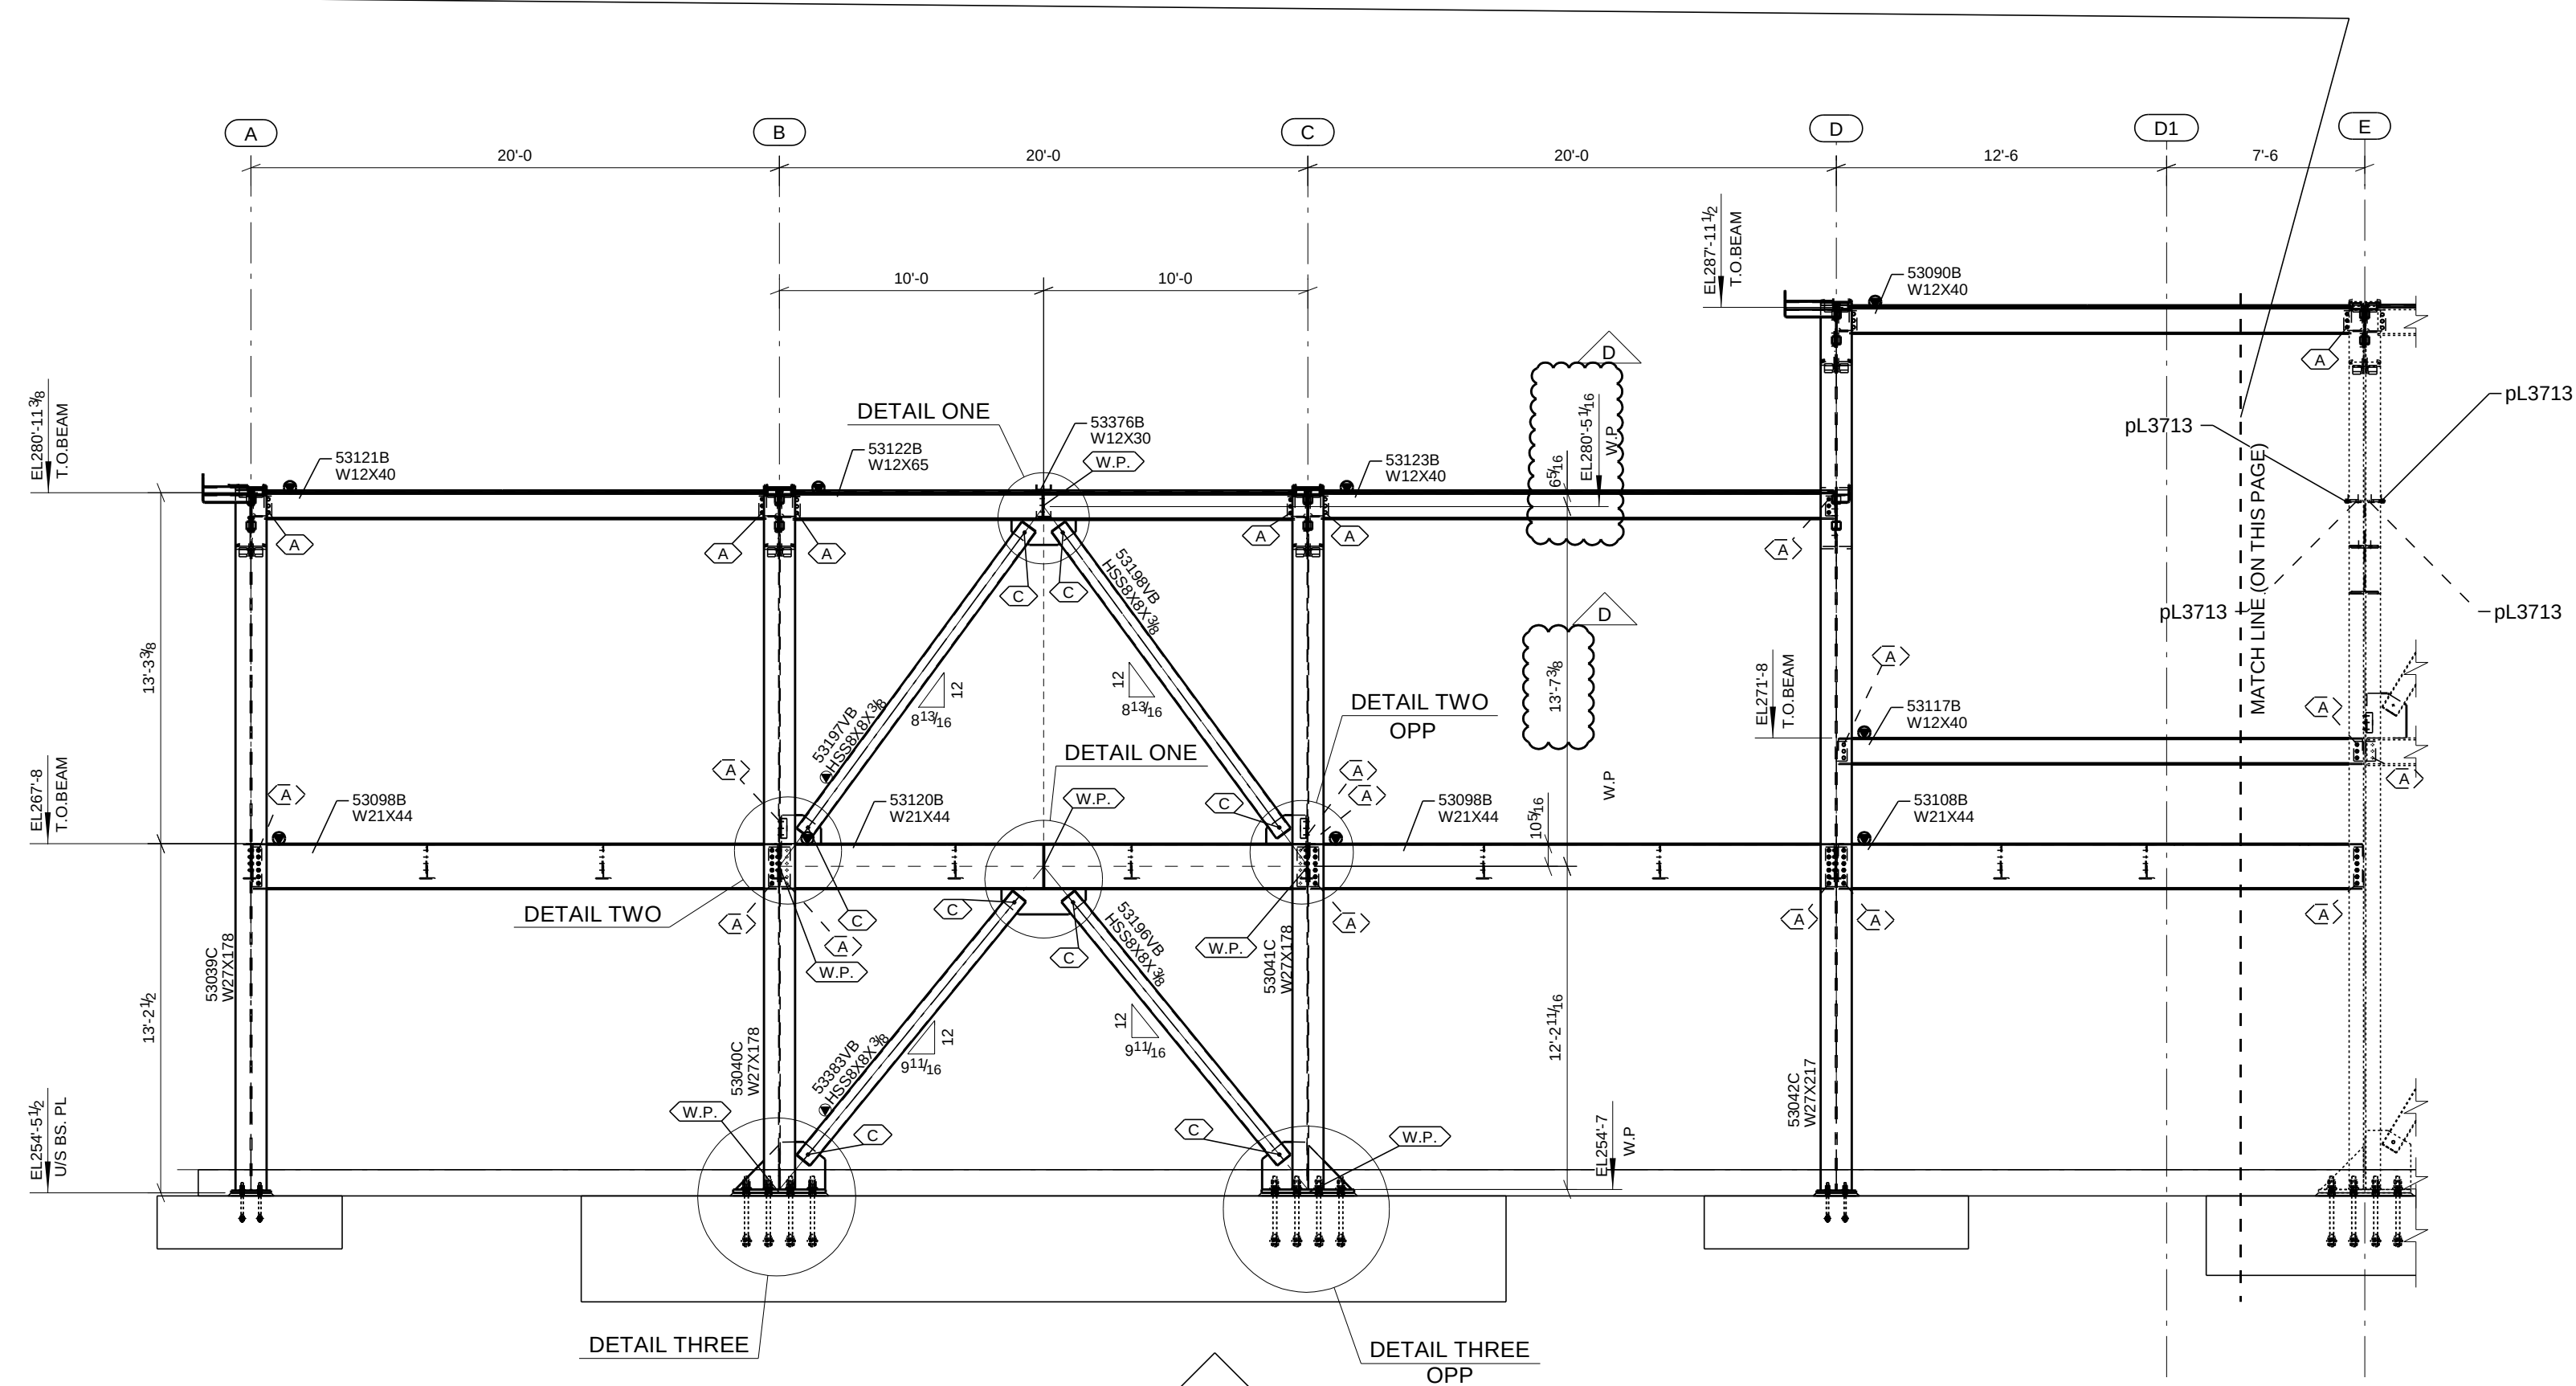


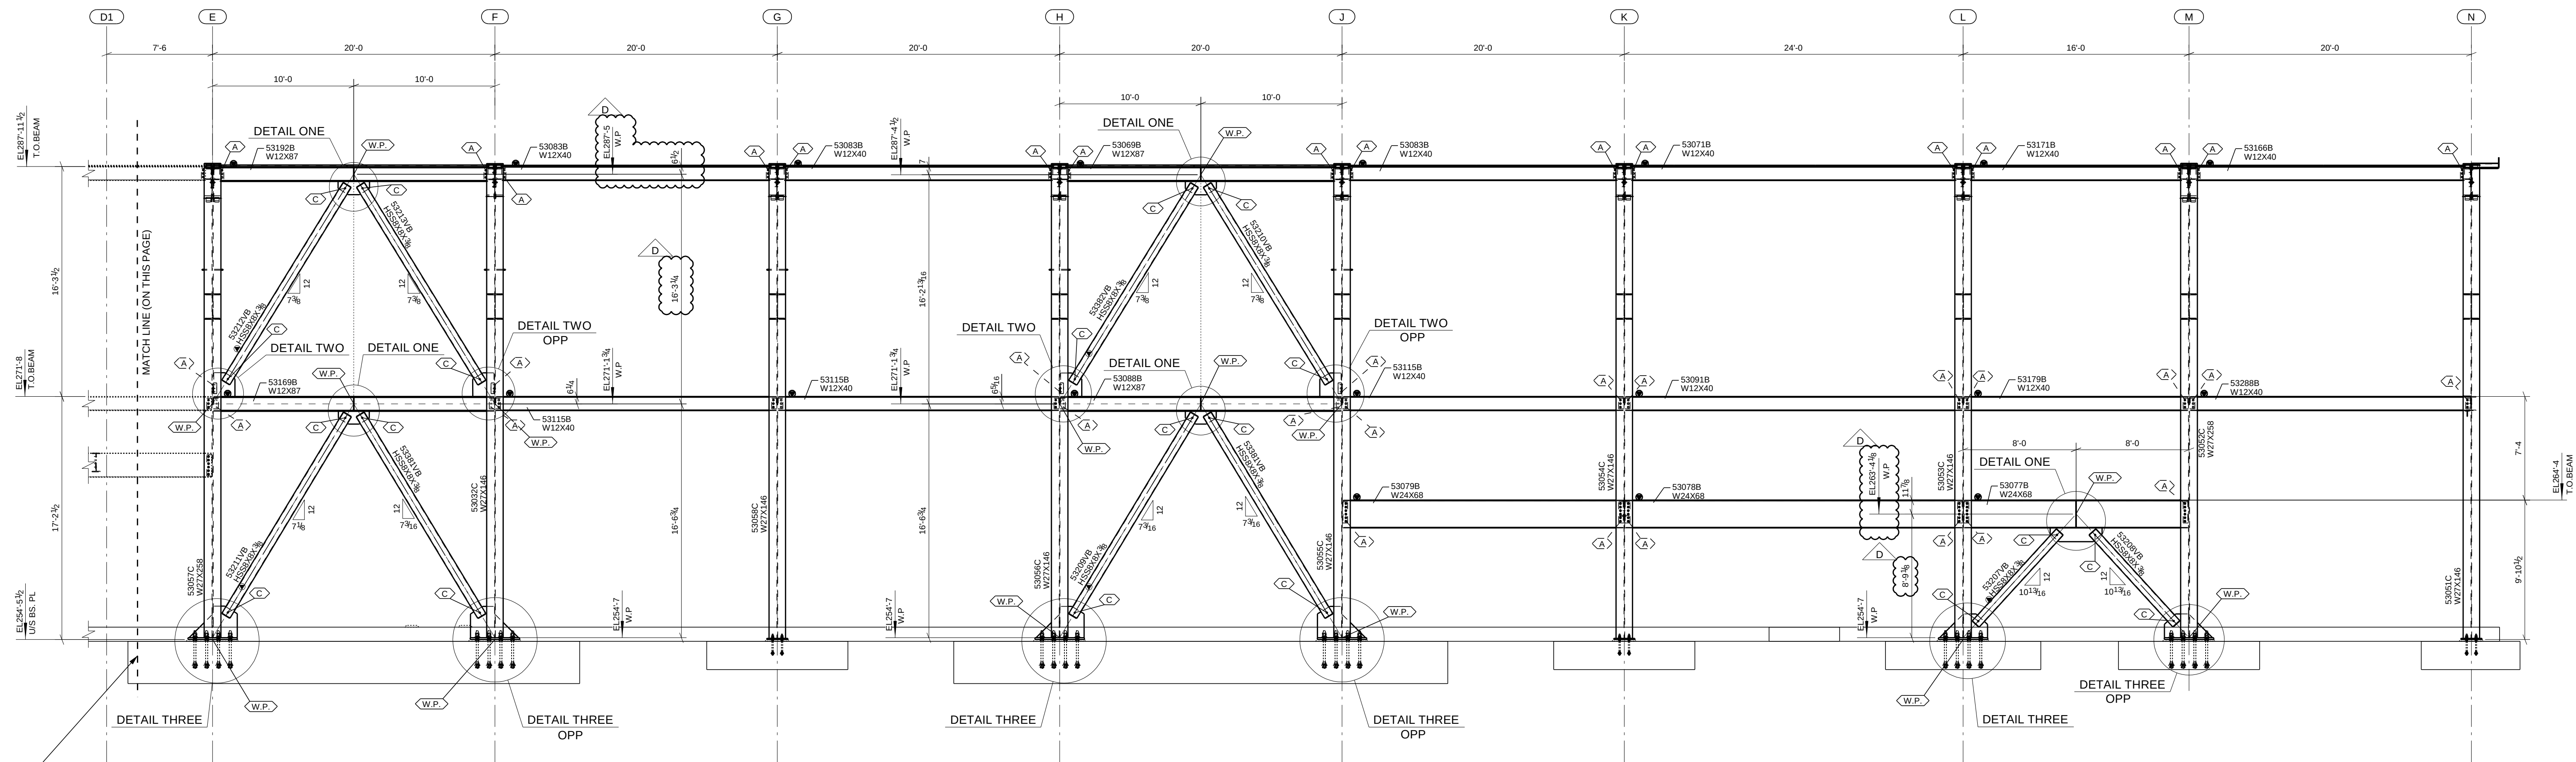

FIELD BOLT CONN. NOTE:
STD. CONN. BOLT ON THIS PAGE
ARE 3/4" DIA. A325N-DT1, GALV U.N.O.

(A) - 3/4" DIA A325-DT1_SC, GALV.
(B) - 5/8" DIA A325N-DT1, GALV.
(C) - 3/4" DIA A307, GALV.
(D) - 7/8" DIA A325N-DT1, GALV.

GENREAL NOTES:
-DE NOTES MOMENT CONNECTION.
-ERECT BEAM WITH MARK IN UPRIGHT POSITION AT SAME END AS SHOWN ON PLANS.
-ERECT BRACING WITH MARK AT SAME END AS SHOWN ON PLANS.
-FOR FIELD BOLT GRADES, SEE POINT TO POINT BOLT LIST, U.N.O.
-WELD SIZES AND LENGTHS CALLED FOR ON THE DRAWINGS ARE THE NET EFFECTIVE REQUIRED (INCREASE WELD SIZE IF IF GAPS EXIST AT THE FAYING SURFACE).
-ELECTRODES FOR FIELD WELDS SHALL BE E70XX.
-(XX-XX)- INDICATES EL. TOP OF STEEL
-S"-INDICATES SLOPE BEAMS

NOTE :
REF. TO DWG E53010
FOR SECTIONS
THIS PAGE U.N.O.

BRACE FRAME ELEVATION VIEW #1 - AREA 53

04/10/2024	RE-ISSUED FOR APPROVAL
11/09/2023	RE-ISSUED FOR APPROVAL
05/08/2023	RE-ISSUED FOR APPROVAL
01/09/2023	For Approval

S&S STEEL FABRICATION

P.O. BOX 129
HURRICANE, UT 84737
PH. 435-635-9801

NO BACK CHARGES WILL BE ACCEPTED WITHOUT PRIOR AUTHORIZATION IN WRITING

NOTE:
FOR ALL DEMAND CRITICAL CJP WELDS, 100% UT SHALL BE PERFORMED.
REF: DW 1802 0001 ITEM M NOTE #M2
DC - DEMAND CRITICAL WELDS
NDE - NON-DESTRUCTIVE EXAMINATION

TEKLA Structures

JOB NAME & LOCATION: WILLAMETTE WATER SUPPLY 21309 SW 124th Avenue. Sherwood, OR 97062	ARCH: MWA ARCHITECTS ENGR: CDM SMITH CONTR:
---	---

REF:	DWG. NO. 335
DRAWN BY: HS 01/09/2023	CHECKED BY: LSL 01/09/2023
SHEET TITLE: BRACE FRAME ELEVATION VIEW #1 - AREA 53	

WORK THIS DWG WITH: E53010